



PRODUCT OVERVIEW

SGS International Ltd.

had been incorporated in Liechtenstein, Schaan with aim to offer the customers a comprehensive range of innovative, science-based dental solutions.

SGS Dental Implant System is not only a dental product, but it is about art and experience in clinical practice as well.

Thanks to qualitative Swiss technology, SGS Dental Implant System provides excellent products at competitive prices with strong support. We use the most precise tools and equipment with the best raw materials, that is why SGS became one of market leaders in the dental implant industry. Our system is used by thousands of professionals all around the world.

TABLE OF CONTENTS



Dental Implants

Conical platform	4
Internal Hexagon - Platform 3.75	4
Narrow Conical platform	5
One-piece platform	5



Conical Platform

Healing caps	6
Open tray transfers	6
Closed tray transfers	7
Analog / Implant analog	7
Checking kit	8
Individual abutments	8
Flat connection	9
Temporary restoration	9
Straight abutments	9
Angular abutments	10
Anatomic angular abutments	10
Zirconium abutments	12
Temporary (peek) abutments	12
Abutments for bars	12
Abutments for immediate loading	13
Easy-fix for immediate loading	13
Multi-Units for immediate loading	13
The-one multi-unit abutments	14
Overdenture - ball attachments	14
Overdenture S-Lock Abutments	15
Overdenture smart-lock abutments	15
Overdenture easy-fix abutments	15



Narrow Conical Platform

Healing caps	16
Open tray transfers	16
Closed tray transfers	16
Analog / Implant analog	16
Checking kit	17
Individual abutments	17
Straight abutments	17
Angular abutments	18
Zirconium abutments	18
Temporary (peek) abutments	18
Abutments for bars	20
Multi-Units for immediate loading	20
Overdenture - ball attachments	20
Overdenture S-Lock Abutments	21
Overdenture Smart-lock abutments	21



Internal Hexagon - Platform 3.75

Healing caps	22
Open tray transfers	22
Closed tray transfers	23
Analog / Implant analog	23
Checking kit	24
Individual abutments	24
Flat connection	25
Temporary restoration	25
Straight abutments	25
Angular abutments	26
Anatomic angular abutments	26
Zirconium abutments	28
Temporary (peek) abutments	28
Abutments for bars	28
Abutments for immediate loading	29
Easy-fix for immediate loading	29
Multi-Units for immediate loading	29
The-one multi-unit abutments	30
Overdenture - ball attachments	30
Overdenture S-Lock Abutments	31
Overdenture smart-lock abutments	31
Overdenture easy-fix abutments	31



One-piece Platform

Transfers	32
Analogs	32
Keys/Drivers	32

Surgical Kits

Basic kit & straight / spiral drill kit	34-35
new kit & straight / spiral drill kit	36-37
Conical stopper drill kit	38-39
Short drills	39
Other drills	39

CAD - CAM

Platforms & description	40-43
-------------------------------	-------

P7D DENTAL IMPLANT



Conical Platform

High pitch, slightly aggressive implant with new special conical connection. It is suitable for immediate loading.

Ø3.5mm	Ø3.75mm	Ø4.2mm	Ø4.5mm	Ø5.0mm	Ø6.0mm
-	-	6 mm	6 mm	6 mm	6 mm
8 mm	8 mm	8 mm	8 mm	8 mm	8 mm
10 mm	10 mm	10 mm	10 mm	10 mm	10 mm
11.5 mm	11.5 mm	11.5 mm	11.5 mm	11.5 mm	11.5 mm
13 mm	13 mm	13 mm	13 mm	13 mm	13 mm
16 mm	16 mm	16 mm	16 mm	16 mm	16 mm

P1D DENTAL IMPLANT



Conical Platform

Short pitch, slightly aggressive implant, which is specially for hard bone (mandibula), with platform shift and conical connection.

Ø3.5mm	Ø3.75mm	Ø4.2mm	Ø5.0mm
-	-	6 mm	6 mm
8 mm	8 mm	8 mm	8 mm
10 mm	10 mm	10 mm	10 mm
11.5 mm	11.5 mm	11.5 mm	11.5 mm
13 mm	13 mm	13 mm	13 mm
16 mm	16 mm	16 mm	16 mm

P7 DENTAL IMPLANT



Internal Hexagon Platform 3.75

High pitch, slightly aggressive implant, which is suitable for immediate loading and excellent integration.

Ø3.2mm	Ø3.75mm	Ø4.2mm	Ø4.5mm	Ø5.0mm	Ø6.0mm
-	-	6 mm	6 mm	6 mm	6 mm
8 mm	8 mm	8 mm	8 mm	8 mm	8 mm
10 mm	10 mm	10 mm	10 mm	10 mm	10 mm
11.5 mm	11.5 mm	11.5 mm	11.5 mm	11.5 mm	11.5 mm
13 mm	13 mm	13 mm	13 mm	13 mm	13 mm
16 mm	16 mm	16 mm	16 mm	16 mm	16 mm

P1 DENTAL IMPLANT



Internal Hexagon Platform 3.75

Short pitch, slightly aggressive implant, which is specially for hard bone (mandibula), with platform shift and internal hex.

Ø3.2mm	Ø3.75mm	Ø4.2mm	Ø5.0mm	Ø6.0mm
-	-	-	6 mm	6 mm
8 mm	8 mm	8 mm	8 mm	8 mm
10 mm	10 mm	10 mm	10 mm	10 mm
11.5 mm	11.5 mm	11.5 mm	11.5 mm	11.5 mm
13 mm	13 mm	13 mm	13 mm	13 mm
16 mm	16 mm	16 mm	16 mm	16 mm

P7N DENTAL IMPLANT



Narrow Conical Platform

High pitch, slightly aggressive implant with special conical connection. It is suitable for immediate loading.

Ø3.0mm	Ø3.2mm
-	-
-	8 mm
10 mm	10 mm
11.5 mm	11.5 mm
13 mm	13 mm
16 mm	16 mm



P7S DENTAL IMPLANT



One-piece Platform

One-piece implant. It has the same parameters like P7. The abutment is integrated.

Ø3.0mm	Ø3.2mm	Ø3.75mm	Ø4.2mm	Ø5.0mm	Ø6.0mm
-	-	-	-	6 mm	6 mm
-	8 mm	8 mm	8 mm	8 mm	8 mm
10 mm	10 mm	10 mm	10 mm	10 mm	10 mm
11.5 mm	11.5 mm	11.5 mm	11.5 mm	11.5 mm	11.5 mm
13 mm	13 mm	13 mm	13 mm	13 mm	13 mm
16 mm	16 mm	16 mm	16 mm	16 mm	16 mm



P9S DENTAL IMPLANT



One-piece Platform

High pitch, slightly aggressive implant with new special conical connection. It is suitable for immediate loading.


Ø2.4mm	Ø3.0mm	Ø3.2mm
-	-	-
-	-	-
10 mm	10 mm	10 mm
11.5 mm	11.5 mm	11.5 mm
13 mm	13 mm	13 mm
16 mm	16 mm	16 mm



P5D&P5G
COMING
SOON




HEALING CAPS //















Product code	Available sizes	Additional info/parts
HAD Healing cap	2 mm (Ref: D10472) 3 mm (Ref: D10473) 4 mm (Ref: D10474) 5 mm (Ref: D10475) 6 mm (Ref: D10476)	Suitable for all implant diameters.
HWD Wide healing cap	3 mm (Ref: D10583) 5 mm (Ref: D10585)	WIDE W Suitable for all implant diameters.
HW7D Wide healing cap	3 mm (Ref: D10703) 5 mm (Ref: D10705)	WIDE W Suitable for all implant diameters.
HW8D Wide healing cap	3 mm (Ref: D10803) 5 mm (Ref: D10805)	WIDE W Suitable for all implant diameters.
HND Narrow healing cap	2 mm (Ref: D10382) 3 mm (Ref: D10383) 4 mm (Ref: D10384)	Suitable for all implant diameters.

OPEN TRAY TRANSFERS //



Product code	Available sizes	Additional info/parts
T1D Transfer	15 mm (Ref: D7615)	-
T5D Transfer	11 mm (Ref: D7611)	SHORT
T4D Transfer	15 mm (Ref: D7615H)	SLIM S
T6D Transfer	11 mm (Ref: D7611S)	SLIM S SHORT
T8D Transfer	15 mm (Ref: D7615S)	SLIM S

CLOSED TRAY TRANSFERS //

Additional info/parts			Available sizes	Product code	
<div>SHORT</div> 			9 mm (Ref: D779)	T1D Transfer	
<div>SHORT</div> <div>SLIM S</div> 			9 mm (Ref: D779S)	T7D Transfer	
 PMP-T3 Peek crown Immediate loading <small>(Ref: M80b)</small>	 PM-T3 Plastic crown Immediate loading <small>(Ref: M80a)</small>	 P-T3 Plastic transfer <small>(Ref: M80)</small>	1 mm (Ref: D791) 2 mm (Ref: D792) 3 mm (Ref: D793) 4 mm (Ref: D794)	T3D Transfer	
 PMP-T3 Peek crown Immediate loading <small>(Ref: M80b)</small>	 PM-T3 Plastic crown Immediate loading <small>(Ref: M80a)</small>	 P-T3 Plastic transfer <small>(Ref: M80)</small>	3 mm (Ref: D79203) <div>NEW</div>	T3D, 20° Transfer	

!

Recommended tightening torque max. 10 Ncm for the screw.


ANALOG / IMPLANT ANALOG //

Additional info/parts	Available sizes	Product code
-----------------------	-----------------	--------------

Analogue



12 mm (Ref: D08)

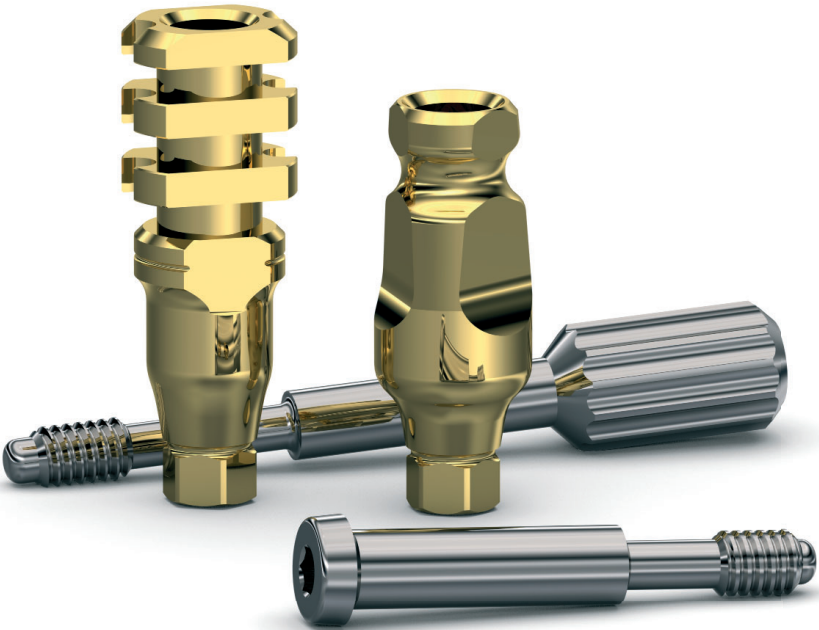A1D





CHECKING KIT //

	Product code	Available sizes	Additional info/parts
	CKD	(Ref: D81)	position checking tool - 0°
	CKD - 15°	(Ref: D8115)	position checking tool - 15°
	CKD - 25°	(Ref: D8125)	position checking tool - 25°
	CKD - 35°	(Ref: D8135)	position checking tool - 35°
	CKD - 45°	(Ref: D8145)	position checking tool - 45°

INDIVIDUAL ABUTMENTS //

	Product code	Available sizes	Additional info/parts
	S1PNHD Abutment for casting	 11 mm (Ref: D82)	Two screws included * :  
	S1PND Abutment for casting	 11 mm (Ref: D81)	Two screws included * :  
	S1PTD Abutment for casting	 11 mm (Ref: D83)	Two screws included * :    Plastic/Titanium
	S1PCHD Abutment for casting	 11 mm (Ref: D85)	Two screws included * :    Plastic/Chrome-cobalt
	S1PCD Abutment for casting	 11 mm (Ref: D84)	Two screws included * :    Plastic/Chrome-cobalt

Recommended tightening torque max. 25 Ncm for the screw.
* Gold screw for the final restoration, silver screw is suitable for the laboratory.



FLAT CONNECTION //

Additional info/parts	Available sizes	Product code
Screw included * :  <i>Titanium</i> 	15 mm (Ref: D28) 	S15D - T
 Recommended tightening torque max. 25 Ncm for the screw. * Screw for the final restoration.		




















TEMPORARY RESTORATION //

Additional info/parts	Available sizes	Product code
Screw included * :  <i>Titanium</i> 	15 mm (Ref: D29) 	S15D - TH Abutment for immediate loading
 Recommended tightening torque max. 25 Ncm for the screw. * Screw for the final restoration.		



STRAIGHT ABUTMENTS //

Additional info/parts	Available sizes	Product code
Two screws included * :  	5 mm (Ref: D115) 7 mm (Ref: D117) 9 mm (Ref: D119) 12 mm (Ref: D1112) 15 mm (Ref: D1115)	S1D Straight abutment
Two screws included * :  	1 mm (Ref: D121) 2 mm (Ref: D122) 3 mm (Ref: D123) 4 mm (Ref: D124) 	S1AD Anatomic straight abutment
Two screws included * :  	7 mm (Ref: D11N7) 9 mm (Ref: D11N9)	S1ND Straight narrow abutment
 Two screws included * :  	9 mm (Ref: D11W9) 12 mm (Ref: D11W12)	S1WD Straight wide abutment
 Two screws included * :  	10 mm (Ref: D11WW10)	S1W8D Straight wide abutment



 Recommended tightening torque max. 25 Ncm for the screw. * Gold screw for the final restoration, silver screw is suitable for the laboratory.		
---	--	--



ANGULAR ABUTMENTS //

**S2D - 15°**
Angular abutment11 mm
(Ref: D131511)

Two screws included * :

**S2LD - 15°**
Angular abutment15 mm
(Ref: D131515)


Two screws included * :

**S2DS - 15°**
Angular abutment15 mm
(Ref: D141511)

Two screws included * :

SLIM
S**S2D - 25°**
Angular abutment11 mm
(Ref: D132511)

Two screws included * :

**S2LD - 25°**
Angular abutment15 mm
(Ref: D132515)

Two screws included * :

**S2DS - 25°**
Angular abutment15 mm
(Ref: D142515)

Two screws included * :

SLIM
S**S2D - 35°**
Angular abutment13 mm
(Ref: D133513)

Two screws included * :

**S2D - 45°**
Angular abutment13 mm
(Ref: D134513)

Two screws included * :

**Recommended tightening torque max. 25 Ncm for the screw.**


* Gold screw for the final restoration, silver screw is suitable for the laboratory.



ANATOMIC ANGULAR ABUTMENTS //

**S2AD - 15°**
Anatomic angular
abutment1 mm (Ref: M15151)
2 mm (Ref: M15152)
3 mm (Ref: M15153)
4 mm (Ref: M15154) **NEW**

Two screws included * :

**S2AD - 25°**
Anatomic angular
abutment1 mm (Ref: M15251)
2 mm (Ref: M15252)
3 mm (Ref: M15253)
4 mm (Ref: M15254) **NEW**

Two screws included * :

**Recommended tightening torque max. 25 Ncm for the screw.**

* Gold screw for the final restoration, silver screw is suitable for the laboratory.



WHY CHOOSE SGS DENTAL SYSTEM?

01



PREMIUM SURFACE


A new microstructured bioactive antibacterial surface for implants! SBTC is a known worldwide type of dental implant coating, having outstanding performances in dental implantation practice.




ZIRCONIUM ABUTMENTS //

**S1AZTD**
Zirconium abutment1 mm (Ref: D161T)
2 mm (Ref: D162T)
3 mm (Ref: D163T)

Screw included * :

**S2AZTD - 15°**
Zirconium abutment1 mm (Ref: D17151T)
2 mm (Ref: D17152T)
3 mm (Ref: D17153T)

Screw included * :

**S2AZTD - 25°**
Zirconium abutment1 mm (Ref: D17251T)
2 mm (Ref: D17252T)
3 mm (Ref: D17253T)


Screw included * :

**Recommended tightening torque max. 25 Ncm for the screw.**

* Screw for the final restoration.



TEMPORARY (PEEK) ABUTMENTS //

**S1AD - Peek**
Peek abutment1 mm (Ref: D181)
2 mm (Ref: D182)
3 mm (Ref: D183)

Screw included * :

**S2AD - Peek - 15°**
Peek abutment1 mm (Ref: D19151)
2 mm (Ref: D19152)
3 mm (Ref: D19153)

Screw included * :

**S2AD - Peek - 25°**
Peek abutment1 mm (Ref: D19251)
2 mm (Ref: D19252)
3 mm (Ref: D19253)

Screw included * :

**Recommended tightening torque max. 20 Ncm for the screw.**







* Screw for the final restoration.




ABUTMENTS FOR BARS //

**S1TD**
Abutment**Package contains:**
plastic without hex0.5 mm (Ref: D8605)
1.5 mm (Ref: D8615)
2.5 mm (Ref: D8625)
3.5 mm (Ref: D8635)Optional:
plastic with hex**Recommended tightening torque max. 25 Ncm for the screw.**

ABUTMENTS FOR IMMEDIATE LOADING //

Additional info/parts	Available sizes	Product code
 P-T3 Plastic transfer (Ref: M80)	1 mm (Ref: D791) 2 mm (Ref: D792) 3 mm (Ref: D793) 4 mm (Ref: D794)	T3D Abutment
 PMP-T3 Peek crown Immediate loading (Ref: M80b)		
 PM-T3 Plastic crown Immediate loading (Ref: M80a)	3 mm (Ref: D79203) 	T3D, 20° Abutment
 T3D - Smart Solution: transfer / immediate loading or temporary loading abutment (Contains: 2 x T3D, P -, PMP -, PM-T3)		
 Recommended tightening torque max. 15 Ncm for the screw.		

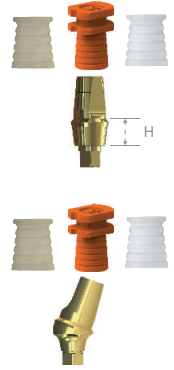



EASY-FIX FOR IMMEDIATE LOADING //

Additional info/parts	Available sizes	Product code
 S4a - Plastic (Ref: C83)	0.5 mm (Ref: D2605) 1.5 mm (Ref: D2615) 2.5 mm (Ref: D2625) 3.5 mm (Ref: D2635)	S4D Abutment
 S4a - Peek (Ref: C84)		
	1 mm (Ref: D32171/C43) 2 mm (Ref: D32172/C43) 3 mm (Ref: D32173/C43)	S4 - S7D - 17° Abutment
	1 mm (Ref: D32301/C43) 2 mm (Ref: D32302/C43) 3 mm (Ref: D32303/C43)	S4 - S7D - 30° Abutment
 Recommended tightening torque max. 20 Ncm for the screw.		




MULTI-UNITS FOR IMMEDIATE LOADING //

Additional info/parts	Available sizes	Product code
 T1 - S6/S7 (Ref: C34)	0.5 mm (Ref: D3105) 1.5 mm (Ref: D3115) 2.5 mm (Ref: D3125) 3.5 mm (Ref: D3135)	S6D Straight multi-unit abutment
 H - S6/S7 (Ref: C33)		
 T - S6/S7 (Ref: C36)		
 A1 - S6/S7 (Ref: C35)	1 mm (Ref: D32171) 2 mm (Ref: D32172) 3 mm (Ref: D32173)	S7D - 17° Multi-base angular abutment
 PH - S6/S7 (Ref: C37)		
 P - S6/S7 (Ref: C38)	1 mm (Ref: D32301) 2 mm (Ref: D32302) 3 mm (Ref: D32303)	S7D - 30° Multi-base angular abutment
 Recommended tightening torque max. 20 Ncm for the screw.		





THE-ONE MULTI-UNIT ABUTMENTS //

Product code	Available sizes	Additional info/parts
 <p>S16DS Multi-unit abutment</p>	1 mm (Ref: D641) 2 mm (Ref: D642) 3 mm (Ref: D643) 4 mm (Ref: D644) 5 mm (Ref: D645)	<p>Closed tray</p>  <p>T3 - S16S/S17S (Ref: C72)</p> <p>Open tray</p>  <p>T1 - S16S/S17S ○ (Ref: C75) ○ (Ref: C76)</p>
 <p>S17DS - 17° Multi-unit abutment</p>	1 mm (Ref: D65171) 2 mm (Ref: D65172) 3 mm (Ref: D65173) 4 mm (Ref: D65174) 5 mm (Ref: D65175)	 <p>H - S16S/S17S (Ref: C66)</p>  <p>A1 - S16S/S17S (Ref: C68)</p>
 <p>S17DS - 30° Multi-unit abutment</p>	1 mm (Ref: D65301) 2 mm (Ref: D65302) 3 mm (Ref: D65303) 4 mm (Ref: D65304) 5 mm (Ref: D65305)	 <p>T - S16S/S17S ○ (Ref: C69) ○ (Ref: C95)</p>  <p>TW - S16S/S17S (Ref: C73)</p>
 <p>S17DS - 45° Multi-unit abutment</p>	1 mm (Ref: D65451) 2 mm (Ref: D65452) 3 mm (Ref: D65453) 4 mm (Ref: D65454) 5 mm (Ref: D65455)	 <p>P - S16S/S17S ○ (Ref: C71)</p>  <p>PH - S16S/S17S ○ (Ref: C85)</p>

Recommended tightening torque max. 20 Ncm for the screw.



OVERDENTURE - BALL ATTACHMENTS //

Product code	Available sizes	Additional info/parts
 <p>S3D Ball-attachment</p>	1 mm (Ref: D201) 2 mm (Ref: D202) 3 mm (Ref: D203) 4 mm (Ref: D204) 5 mm (Ref: D205) 6 mm (Ref: D206)	 <p>S3D Package contains: Metal cap (Ref: C21) Standard silicone (Ref: C23) Protective Disk (Ref: C122)</p>
 <p>S3 - S7D - 17° Ball-attachment</p>	1 mm (Ref: D32171/C4205) 2 mm (Ref: D32172/C4205) 3 mm (Ref: D32173/C4205)	 <p>S3-S7D Package contains: Metal cap (Ref: C21) Standard silicone (Ref: C23) Protective Disk (Ref: C122)</p> <p>Ball 0.5mm (Ref: C4205)</p>
 <p>S3 - S7D - 30° Ball-attachment</p>	1 mm (Ref: D32301/C4205) 2 mm (Ref: D32302/C4205) 3 mm (Ref: D32303/C4205)	<p>Optional:</p> <p>Hard silicone (Ref: C22)</p> <p>Standard silicone (Ref: C23)</p> <p>Soft silicone (Ref: C24)</p> <p>Ball 1mm (Ref: C421) Ball 2mm (Ref: C422)</p>



Recommended tightening torque max. 25 Ncm for the screw.





OVERDENTURE S-LOCK ABUTMENTS //

Additional info/parts	Available sizes	Product code
 <p>Package contains: Metal cap (Ref: C116) Laboratory (Ref: C117) Extra soft (Ref: C118) Soft (Ref: C119) Standard (Ref: C120) Strong (Ref: C121) Protective Disk (Ref: C122)</p>	1 mm (Ref: D1121) 2 mm (Ref: D1122) 3 mm (Ref: D1123) 4 mm (Ref: D1124) 5 mm (Ref: D1125) 6 mm (Ref: D1126)	S35D Abutment
 <p>Optional: Transfer T1-S35 (Ref: C114) Analog A1-S35 (Ref: C115)</p>	1 mm (Ref: D32171/C113) 2 mm (Ref: D32172/C113) 3 mm (Ref: D32173/C113)	S35 - S7D - 17° Abutment
 <p>K21 Hand tool (Ref: B21)</p>	1 mm (Ref: D32301/C113) 2 mm (Ref: D32302/C113) 3 mm (Ref: D32303/C113)	S35 - S7D - 30° Abutment


! Recommended tightening torque max. 20 Ncm for the screw.







OVERDENTURE SMART-LOCK ABUTMENTS //

Additional info/parts	Available sizes	Product code
 <p>K4 (Ref: C56) Transfer T1-S8 (Ref: C48)</p>	Straight package: Metal cap (Ref: C50) Laboratory (Ref: C54) Hard (Ref: C51) Medium (Ref: C52) Soft (Ref: C53) Protective Disk (Ref: C122)	1 mm (Ref: D451) 2 mm (Ref: D452) 3 mm (Ref: D453) 4 mm (Ref: D454) 5 mm (Ref: D455) 6 mm (Ref: D456)
 <p>Analog A1-S8 (Ref: C49) Magic Tool (Ref: C55)</p>	Angular package: Metal cap (Ref: C50) Laboratory (Ref: C54) Hard (Ref: C51b) Medium (Ref: C52) Soft (Ref: C53) Protective Disk (Ref: C122)	1.5 mm (Ref: D461515) 3 mm (Ref: D46153)



! Recommended tightening torque max. 20 Ncm for the screw.



OVERDENTURE EASY-FIX ABUTMENTS //


Additional info/parts	Available sizes	Product code
 <p>Straight package: Metal cap (Ref: C50) Laboratory (Ref: C54) Medium (Ref: C52)</p>	1 mm (Ref: D571) 2 mm (Ref: D572) 3 mm (Ref: D573) 4 mm (Ref: D574) 5 mm (Ref: D575) 6 mm (Ref: D576)	S5D Abutment
 <p>Angular package: Metal cap (Ref: C50) Laboratory (Ref: C54) Hard (Ref: C51b) Soft (Ref: C53)</p>	1 mm (Ref: D32171/C441) 2 mm (Ref: D32172/C441) 3 mm (Ref: D32173/C441)	S5 - S7D - 17° Abutment
 <p>S5 - S7 1 mm (Ref: C441) 2 mm (Ref: C442)</p>	1 mm (Ref: D32301/C441) 2 mm (Ref: D32302/C441) 3 mm (Ref: D32303/C441)	S5 - S7D - 30° Abutment
 <p>Optional: Transfer T1-S5 (Ref: C58) Analog A1-S5 (Ref: C59)</p>		

! Recommended tightening torque max. 20 Ncm for the screw.





HEALING CAPS //



Product code	Available sizes	Additional info/parts
HN - 2.1 Healing cap	2 mm (Ref: N10472) 3 mm (Ref: N10473) 4 mm (Ref: N10474)	-
HWN - 2.1 Wide healing cap	2 mm (Ref: N10582) 4 mm (Ref: N10584)	WIDE W
HNN - 2.1 Narrow healing cap	2 mm (Ref: N10382) 4 mm (Ref: N10384)	-

OPEN TRAY TRANSFERS //



Product code	Available sizes	Additional info/parts
T1N - 2.1 Transfer	15 mm (Ref: N76)	-

CLOSED TRAY TRANSFERS //



Product code	Available sizes	Additional info/parts
T3N - 2.1 Transfer	9 mm (Ref: N79)	PM-T3 Plastic crown Immediate loading (Ref: M80a) P-T3 Plastic transfer (Ref: M80)
T2N - 2.1 Transfer	9 mm (Ref: N78)	-

Recommended tightening torque max. 10 Ncm for the screw.



ANALOG / IMPLANT ANALOG //







Product code	Available sizes	Additional info/parts
A1N - 2.1	10 mm (Ref: N08)	Analog

CHECKING KIT //

Additional info/parts	Available sizes	Product code
position checking tool - 0°	(Ref: N81)	CKN - 2.1
position checking tool - 15°	(Ref: N8115)	CKN - 2.1, 15°
position checking tool - 25°	(Ref: N8125)	CKN - 2.1, 25°






INDIVIDUAL ABUTMENTS //

Additional info/parts	Available sizes	Product code
Two screws included * : 	10 mm (Ref: N82)	S1PNHN - 2.1 Abutment for casting
Two screws included * : 	10 mm (Ref: N81)	S1PNN - 2.1 Abutment for casting
Two screws included * :  ! Plastic/Chrome-cobalt	11 mm (Ref: N85)	S1PCHN - 2.1 Abutment for casting
Two screws included * :  ! Plastic/Titanium	11 mm (Ref: N83)	S1PTN - 2.1 Abutment for casting



! Recommended tightening torque max. 25 Ncm for the screw.
* Green screw for the final restoration, silver screw is suitable for the laboratory.

STRAIGHT ABUTMENTS //

Additional info/parts	Available sizes	Product code
Two screws included * : 	9 mm (Ref: N119)	S1N - 2.1 Straight abutment
WIDE W Two screws included * : 	9 mm (Ref: N11W9)	S1WN - 2.1 Straight wide abutment
Two screws included * : 	1 mm (Ref: N121)	S1AN - 2.1 Anatomic straight abutment



! Recommended tightening torque max. 25 Ncm for the screw.
* Green screw for the final restoration, silver screw is suitable for the laboratory.

ANGULAR ABUTMENTS //

Product code	Available sizes	Additional info/parts
 S2N - 2.1, 15° Angular abutment	10 mm (Ref: N1315)	Two screws included * :  
 S2N - 2.1, 25° Angular abutment	10 mm (Ref: N1325)	Two screws included * :  
 S2AN - 2.1, 15° Anatomic angular abutment	1 mm (Ref: N15151)	Two screws included * :  
 S2AN - 2.1, 25° Anatomic angular abutment	1 mm (Ref: N15251)	Two screws included * :  
Recommended tightening torque max. 25 Ncm for the screw. * Green screw for the final restoration, silver screw is suitable for the laboratory. 		

ZIRCONIUM ABUTMENTS //

Product code	Available sizes	Additional info/parts
 S1AZNT - 2.1 Zirconium abutment	1 mm (Ref: N161T) 2 mm (Ref: N162T)	Screw included * : 
 S2AZNT - 2.1 - 15° Zirconium abutment	1 mm (Ref: N17151T) 2 mm (Ref: N17152T)	Screw included * : 
 S2AZNT - 2.1 - 25° Zirconium abutment	1 mm (Ref: N17251T) 2 mm (Ref: N17252T)	Screw included * : 
Recommended tightening torque max. 20 Ncm for the screw. * Screw for the final restoration. 		

TEMPORARY (PEEK) ABUTMENTS //

Product code	Available sizes	Additional info/parts
 S1AN - Peek - 2.1 Peek abutment	1 mm (Ref: N181)	Screw included * : 
 S2AN - Peek - 2.1, 15° Peek abutment	1 mm (Ref: N19151)	Screw included * : 
 S2AN - Peek - 2.1, 25° Peek abutment	1 mm (Ref: N19251)	Screw included * : 
Recommended tightening torque max. 20 Ncm for the screw. * Screw for the final restoration. 		

WHY CHOOSE SGS DENTAL SYSTEM?

02



LIFETIME WARRANTY

SGS Dental Implant takes responsibility for all of its implants and gives life-time warranty when used in accordance with the supplied instructions for use and the company protocols.



ABUTMENTS FOR BARS //



Product code	Available sizes	Additional info/parts
S1TN - 2.1 Abutment	Package contains: plastic without hex ○	 Optional: plastic with hex
	0.5 mm (Ref: N8605)	
	1.5 mm (Ref: N8615)	
	2.5 mm (Ref: N8625)	

Recommended tightening torque max. 25 Ncm for the screw.



MULTI-UNITS FOR IMMEDIATE LOADING //

Product code	Available sizes	Additional info/parts
 S6N - 2.1 Straight multi-unit abutment	0.5 mm (Ref: N3105)	 T1 - S6/S7 (Ref: C34)
	1.5 mm (Ref: N3115)	
	2.5 mm (Ref: N3125)	
 S7N - 2.1, 17° Multi-base angular abutment	1.5 mm (Ref: N321715/C40)	 H - S6/S7 (Ref: C33)
	2.5 mm (Ref: N321725/C40)	
 S7N - 2.1, 30° Multi-base angular abutment	1.5 mm (Ref: N323015/C40)	 PH - S6/S7 (Ref: C37)
	2.5 mm (Ref: N323025/C40)	

Recommended tightening torque max. 25 Ncm for the screw.





OVERDENTURE - BALL ATTACHMENTS //

Product code	Available sizes	Additional info/parts
 S3N - 2.1 Ball-attachment	1 mm (Ref: N201)	 Package contains: Metal cap (Ref: C21) Standard silicone (Ref: C23) Protective Disk (Ref: C122)
	2 mm (Ref: N202)	
	3 mm (Ref: N203)	
	4 mm (Ref: N204)	
 S3NN - 2.1 Ball-attachment	1 mm (Ref: N20N1)	 Optional: Hard silicone (Ref: C22) Soft silicone (Ref: C24)
	2 mm (Ref: N20N2)	
	3 mm (Ref: N20N3)	
	4 mm (Ref: N20N4)	

Recommended tightening torque max. 25 Ncm for the screw.











OVERDENTURE S-LOCK ABUTMENTS //


Additional info/parts	Available sizes	Product code
 <p>Package contains:</p> <ul style="list-style-type: none">Metal cap (Ref: C116)Laboratory (Ref: C117)Extra soft (Ref: C118)Soft (Ref: C119)Standard (Ref: C120)Strong (Ref: C121)Protective Disk (Ref: C122)	<ul style="list-style-type: none">1 mm (Ref: N1121)2 mm (Ref: N1122)3 mm (Ref: N1123)	S35N - 2.1 Abutment 

! Recommended tightening torque max. 20 Ncm for the screw.

OVERDENTURE SMART-LOCK ABUTMENTS //


Additional info/parts	Available sizes	Product code
 <p>Transfer T1-S5 (Ref: C58)</p>  <p>Analog A1-S5 (Ref: C59)</p>  <p>S5 - S7 1 mm (Ref: C441) 2 mm (Ref: C442)</p>	<ul style="list-style-type: none">1 mm (Ref: N571)2 mm (Ref: N572)3 mm (Ref: N573)4 mm (Ref: N574)	S5N - 2.1 Abutment 
 <p>Straight package: Metal cap (Ref: C50) Laboratory (Ref: C54) Medium (Ref: C52)</p>	<ul style="list-style-type: none">1.5 mm (Ref: N321715/C441)2.5 mm (Ref: N321725/C441)	S5 - S7N - 17° Abutment 
 <p>Angular package: Metal cap (Ref: C50) Laboratory (Ref: C54) Hard (Ref: C51b) Soft (Ref: C53)</p>	<ul style="list-style-type: none">1.5 mm (Ref: N323015/C441)2.5 mm (Ref: N323025/C441)	S5 - S7N - 30° Abutment 

! Recommended tightening torque max. 20 Ncm for the screw.

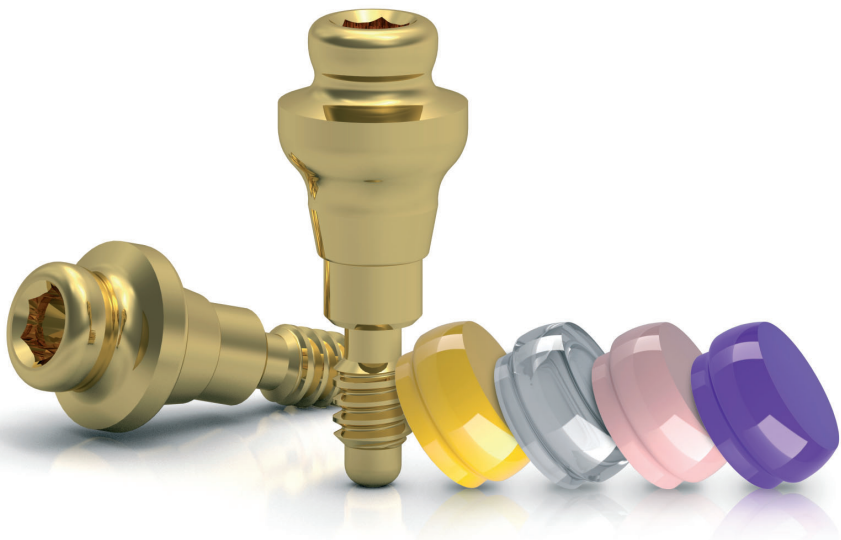



HEALING CAPS //



H - 3.75
Healing cap

2 mm (Ref: M10472)
3 mm (Ref: M10473)
4 mm (Ref: M10474)
5 mm (Ref: M10475)
6 mm (Ref: M10476)

Suitable for
all implant diameters.




HW - 3.75
Wide healing cap

3 mm (Ref: M10583)
5 mm (Ref: M10585)

WIDE
W

Suitable for
all implant diameters.



HW7 - 3.75
Wide healing cap

3 mm (Ref: M10703)
5 mm (Ref: M10705)

WIDE
W

Suitable for
all implant diameters.



HW8 - 3.75
Wide healing cap

3 mm (Ref: M10803)
5 mm (Ref: M10805)

WIDE
W

Suitable for
all implant diameters.



HN - 3.75
Narrow healing cap

3 mm (Ref: M10383)
5 mm (Ref: M10385)

Suitable for
all implant diameters.

OPEN TRAY TRANSFERS //



T1 - 3.75
Transfer

15 mm (Ref: M7615)

-



T5 - 3.75
Transfer

11 mm (Ref: M7611)

SHORT



T4 - 3.75
Transfer

15 mm (Ref: M7615H)

SLIM
S



T6 - 3.75
Transfer

11 mm (Ref: M7611S)

SLIM
S SHORT















T8 - 3.75
Transfer


15 mm (Ref: M7615S)

SLIM
S

CLOSED TRAY TRANSFERS //






Additional info/parts			Available sizes	Product code	
<div>SHORT</div> 			9 mm (Ref: M779)	T1 - 3.75 Transfer	
<div>SHORT</div> <div>SLIM S</div> 			9 mm (Ref: M779S)	T7 - 3.75 Transfer	
 PMP-T3 Peek crown Immediate loading (Ref: M80b)	 PM-T3 Plastic crown Immediate loading (Ref: M80a)	 P-T3 Plastic transfer (Ref: M80)	1 mm (Ref: M791) 2 mm (Ref: M792) 3 mm (Ref: M793) 4 mm (Ref: M794)	T3 - 3.75 Transfer	
 PMP-T3 Peek crown Immediate loading (Ref: M80b)	 PM-T3 Plastic crown Immediate loading (Ref: M80a)	 P-T3 Plastic transfer (Ref: M80)	3 mm (Ref: M79203) <div>NEW</div>	T3 - 3.75, 20° Transfer	
<div>!</div> Recommended tightening torque max. 10 Ncm for the screw.					

ANALOG / IMPLANT ANALOG //






Additional info/parts			Available sizes	Product code	
-			12 mm (Ref: M08)	A1 - 3.75 Analog	



CHECKING KIT //

Product code	Available sizes	Additional info/parts
 CK - 3.75, 0°	(Ref: M81)	position checking tool - 0°
 CK - 3.75, 15°	(Ref: M8115)	position checking tool - 15°
 CK - 3.75, 25°	(Ref: M8125)	position checking tool - 25°
 CK - 3.75, 35°	(Ref: M8135)	position checking tool - 35°
 CK - 3.75, 45°	(Ref: M8145)	position checking tool - 45°

INDIVIDUAL ABUTMENTS //

Product code	Available sizes	Additional info/parts
 S1PNH - 3.75 Abutment for casting	 11 mm (Ref: M82)	Two screws included * :  
 S1PN - 3.75 Abutment for casting	 11 mm (Ref: M81)	Two screws included * :  
 S1PT - 3.75 Abutment for casting	 11 mm (Ref: M83)	Two screws included * :    <i>Plastic/Titanium</i>
 S1PCH - 3.75 Abutment for casting	 11 mm (Ref: M85)	Two screws included * :    <i>Plastic/Chrome-cobalt</i>
 S1PC - 3.75* Abutment for casting	 11 mm (Ref: M84)	Two screws included * :    <i>Plastic/Chrome-cobalt</i>

Recommended tightening torque max. 25 Ncm for the screw.
* Blue screw for the final restoration, silver screw is suitable for the laboratory.





















FLAT CONNECTION //

Additional info/parts	Available sizes	Product code
Screw included * :  Titanium	 15 mm (Ref: M28) 	S15 - T - 3.75 
 Recommended tightening torque max. 25 Ncm for the screw. * Screw for the final restoration.		

TEMPORARY RESTORATION //

Additional info/parts	Available sizes	Product code
Screw included * :  Titanium	 15 mm (Ref: M29) 	S15 - TH - 3.75 Abutment for immediate loading 
 Recommended tightening torque max. 25 Ncm for the screw. * Screw for the final restoration.		


STRAIGHT ABUTMENTS //

Additional info/parts	Available sizes	Product code
Two screws included * :  	5 mm (Ref: M115) 7 mm (Ref: M117) 9 mm (Ref: M119) 12 mm (Ref: M1112) 15 mm (Ref: M1115)	S1 - 3.75 Straight abutment 
Two screws included * :  	1 mm (Ref: M121) 2 mm (Ref: M122) 3 mm (Ref: M123) 4 mm (Ref: M124)	S1A - 3.75 Anatomic straight abutment 
Two screws included * :  	7 mm (Ref: M11N7) 9 mm (Ref: M11N9)	S1N - 3.75 Straight narrow abutment 
 Two screws included * :  	9 mm (Ref: M11W9) 12 mm (Ref: M11W12)	S1W - 3.75 Straight wide abutment 
 Two screws included * :  	10 mm (Ref: M11WW10)	S1W8 - 3.75 Straight wide abutment 
 Recommended tightening torque max. 25 Ncm for the screw. * Blue screw for the final restoration, silver screw is suitable for the laboratory.		









ANGULAR ABUTMENTS //


Product code	Available sizes	Additional info/parts
 S2 - 3.75, 15° Angular abutment	11 mm (Ref: M131511)	Two screws included * :  
 S2L - 3.75, 15° Angular abutment	15 mm (Ref: M131515)	Two screws included * :  
 S2S - 3.75, 15° Angular abutment	15 mm (Ref: M141515)	SLIM S Two screws included * :  
 S2 - 3.75, 25° Angular abutment	11 mm (Ref: M132511)	Two screws included * :  
 S2L - 3.75, 25° Angular abutment	15 mm (Ref: M132515)	Two screws included * :  
 S2S - 3.75, 25° Angular abutment	15 mm (Ref: M142515)	SLIM S Two screws included * :  
 S2 - 3.75, 35° Angular abutment	13 mm (Ref: M133511)	Two screws included * :  
 S2 - 3.75, 45° Angular abutment	13 mm (Ref: M134511)	Two screws included * :  

Recommended tightening torque max. 25 Ncm for the screw. 

* Blue screw for the final restoration, silver screw is suitable for the laboratory.

ANATOMIC ANGULAR ABUTMENTS //

Product code	Available sizes	Additional info/parts
 S2A - 3.75, 15° Anatomic angular abutment	1 mm (Ref: M15151) 2 mm (Ref: M15152) 3 mm (Ref: M15153) 4 mm (Ref: M15154) NEW	Two screws included * :  
 S2A - 3.75, 25° Anatomic angular abutment	1 mm (Ref: M15251) 2 mm (Ref: M15252) 3 mm (Ref: M15253) 4 mm (Ref: M15254) NEW	Two screws included * :  

Recommended tightening torque max. 25 Ncm for the screw. 

* Blue screw for the final restoration, silver screw is suitable for the laboratory.

WHY CHOOSE SGS DENTAL SYSTEM?

03




SWISS QUALITY

We use the most precise tools and equipments with the best raw material, that is why SGS became one of market leaders in the dental implant industry.




ZIRCONIUM ABUTMENTS //



S1AZT - 3.75
Zirconium abutment

1 mm (Ref: M161T)
2 mm (Ref: M162T)
3 mm (Ref: M163T)


Screw included * :



S2AZT - 3.75, 15°
Zirconium abutment

1 mm (Ref: M17151T)
2 mm (Ref: M17152T)
3 mm (Ref: M17153T)

Screw included * :



S2AZT - 3.75, 25°
Zirconium abutment

1 mm (Ref: M17251T)
2 mm (Ref: M17252T)
3 mm (Ref: M17253T)

Screw included * :




Recommended tightening torque max. 25 Ncm for the screw.

* Screw for the final restoration.



TEMPORARY (PEEK) ABUTMENTS //



S1A - Peek - 3.75
Peek abutment

1 mm (Ref: M181)
2 mm (Ref: M182)
3 mm (Ref: M183)

Screw included * :



S2A - Peek - 3.75, 15°
Peek abutment

1 mm (Ref: M19151)
2 mm (Ref: M19152)
3 mm (Ref: M19153)

Screw included * :



S2A - Peek - 3.75, 25°
Peek abutment

1 mm (Ref: M19251)
2 mm (Ref: M19252)
3 mm (Ref: M19253)

Screw included * :



Recommended tightening torque max. 20 Ncm for the screw.

* Screw for the final restoration.



ABUTMENTS FOR BARS //



S1T - 3.75
Abutment

Package contains:
plastic without hex



0.5 mm (Ref: M8605)
1.5 mm (Ref: M8615)
2.5 mm (Ref: M8625)
3.5 mm (Ref: M8635)




Optional:
plastic with hex





Recommended tightening torque max. 25 Ncm for the screw.




ABUTMENTS FOR IMMEDIATE LOADING //

Additional info/parts	Available sizes	Product code
 P-T3 Plastic transfer (Ref: M80)	1 mm (Ref: M791) 2 mm (Ref: M792) 3 mm (Ref: M793) 4 mm (Ref: M794)	T3 - 3.75 Abutment
 PMP-T3 Peek crown Immediate loading (Ref: M80b)		
 PM-T3 Plastic crown Immediate loading (Ref: M80a)	3 mm (Ref: M79203) NEW	T3 - 3.75, 20° Abutment

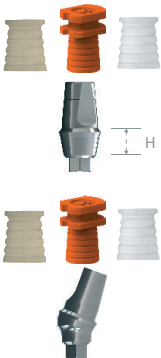


**T3-3.75 - Smart Solution: transfer / immediate loading or temporary loading abutment** (Contains: 2 x T3, P -, PMP -, PM-T3)

**Recommended tightening torque max. 15 Ncm for the screw.**





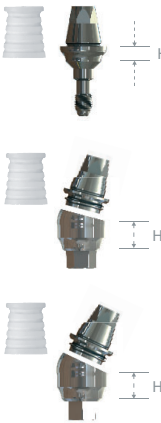

EASY-FIX FOR IMMEDIATE LOADING //


Additional info/parts	Available sizes	Product code
	0.5 mm (Ref: M2605) 1.5 mm (Ref: M2615) 2.5 mm (Ref: M2625)	S4 - 3.75 Abutment
 S4a - Plastic (Ref: C83)	 S4a - Peek (Ref: C84)	1 mm (Ref: M32171/C43) 2 mm (Ref: M32172/C43) 3 mm (Ref: M32173/C43) S4 - S7 - 3.75, 17° Abutment
	1 mm (Ref: M32301/C43) 2 mm (Ref: M32302/C43) 3 mm (Ref: M32303/C43)	S4 - S7 - 3.75, 30° Abutment



**Recommended tightening torque max. 15 Ncm for the screw.**

MULTI-UNITS FOR IMMEDIATE LOADING //



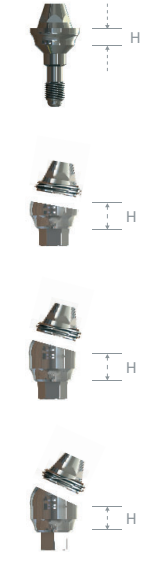









Additional info/parts	Available sizes	Product code
 T1 - S6/S7 (Ref: C34)	 A1 - S6/S7 (Ref: C35)	0.5 mm (Ref: M3105) 1.5 mm (Ref: M3115) 2.5 mm (Ref: M3125) 3.5 mm (Ref: M3135) S6 - 3.75 Straight multi-unit abutment
 H - S6/S7 (Ref: C33)	 T - S6/S7 (Ref: C36)	1 mm (Ref: M32101/C40) 2 mm (Ref: M32102/C40) S7 - 3.75, 10° Multi-base angular abutment
 PH - S6/S7 (Ref: C37)	 P - S6/S7 (Ref: C38)	1 mm (Ref: M32171/C40) 2 mm (Ref: M32172/C40) 3 mm (Ref: M32173/C40) S7 - 3.75, 17° Multi-base angular abutment
		1 mm (Ref: M32301/C40) 2 mm (Ref: M32302/C40) 3 mm (Ref: M32303/C40) S7 - 3.75, 30° Multi-base angular abutment



**Recommended tightening torque max. 20 Ncm for the screw.**



THE-ONE MULTI-UNIT ABUTMENTS //

Product code	Available sizes	Additional info/parts
 S16S - 3.75 Multi-unit abutment	1 mm (Ref: M641) 2 mm (Ref: M642) 3 mm (Ref: M643) 4 mm (Ref: M644) 5 mm (Ref: M645)	Closed tray  T3 - S16S/S175 (Ref: C72) Open tray  T1 - S16S/S175 ○ (Ref: C75) ○ (Ref: C76)  A1 - S16S/S175 (Ref: C68)
 S17S - 3.75, 17° Multi-unit abutment	1 mm (Ref: M65171) 2 mm (Ref: M65172) 3 mm (Ref: M65173) 4 mm (Ref: M65174) 5 mm (Ref: M65175)	 H - S16S/S175 (Ref: C66)
 S17S - 3.75, 30° Multi-unit abutment	1 mm (Ref: M65301) 2 mm (Ref: M65302) 3 mm (Ref: M65303) 4 mm (Ref: M65304) 5 mm (Ref: M65305)	 T - S16S/S175 ○ (Ref: C69) ○ (Ref: C95)  TW - S16S/S175 (Ref: C73)
 S17S - 3.75, 45° Multi-unit abutment	1 mm (Ref: M65451) 2 mm (Ref: M65452) 3 mm (Ref: M65453) 4 mm (Ref: M65454) 5 mm (Ref: M65455)	 P - S16S/S175 ○ (Ref: C71)  PH - S16S/S175 ○ (Ref: C85)

Recommended tightening torque max. 20 Ncm for the screw.





OVERDENTURE - BALL ATTACHMENTS //




Product code	Available sizes	Additional info/parts
 S3 - 3.75 Ball-attachment	1 mm (Ref: M201) 2 mm (Ref: M202) 3 mm (Ref: M203) 4 mm (Ref: M204) 5 mm (Ref: M205) 6 mm (Ref: M206)	 S3 - 3.75 Package contains: Metal cap (Ref: C21) Standard silicone (Ref: C23) Protective Disk (Ref: C122)
 S3-S7 - 3.75, - 17° Ball-attachment	1 mm (Ref: M32171/C4205) 2 mm (Ref: M32172/C4205) 3 mm (Ref: M32173/C4205)	 S3-S7 - 3.75 Package contains: Metal cap (Ref: C21) Standard silicone (Ref: C23) Protective Disk (Ref: C122)  Ball 0.5mm (Ref: C4205)
 S3-S7 - 3.75, - 30° Ball-attachment	1 mm (Ref: M32301/C4205) 2 mm (Ref: M32302/C4205) 3 mm (Ref: M32303/C4205)	Optional:  Hard silicone (Ref: C22)  Standard silicone (Ref: C23)  Soft silicone (Ref: C24)  Ball 1mm (Ref: C421) Ball 2mm (Ref: C422)

Recommended tightening torque max. 25 Ncm for the screw.







OVERDENTURE S-LOCK ABUTMENTS //



Additional info/parts	Available sizes	Product code
 <p>Package contains: Metal cap (Ref: C116) Laboratory (Ref: C117) Extra soft (Ref: C118) Soft (Ref: C119) Standard (Ref: C120) Strong (Ref: C121) Protective Disk (Ref: C122)</p> <p>Optional: Transfer T1-S35 (Ref: C114)</p>  <p>Analog A1-S35 (Ref: C115)</p> <p>K21 Hand tool (Ref: B21)</p>	1 mm (Ref: M1121) 2 mm (Ref: M1122) 3 mm (Ref: M1123) 4 mm (Ref: M1124) 5 mm (Ref: M1125) 6 mm (Ref: M1126)	S35 - 3.75 Abutment
	1 mm (Ref: M32171/C113) 2 mm (Ref: M32172/C113) 3 mm (Ref: M32173/C113)	S35 - S7 - 3.75, 17° Abutment
	1 mm (Ref: M32301/C113) 2 mm (Ref: M32302/C113) 3 mm (Ref: M32303/C113)	S35 - S7 - 3.75, 30° Abutment



Recommended tightening torque max. 20 Ncm for the screw.





OVERDENTURE SMART-LOCK ABUTMENTS //




Additional info/parts	Available sizes	Product code
 <p>K4 (Ref: C56)</p>  <p>Transfer T1-S8 (Ref: C48)</p>  <p>Analog A1-S8 (Ref: C49)</p>  <p>Magic Tool (Ref: C55)</p> <p>Straight package: Metal cap (Ref: C50) Laboratory (Ref: C54) Hard (Ref: C51) Medium (Ref: C52) Soft (Ref: C53) Protective Disk (Ref: C122)</p> <p>Angular package: Metal cap (Ref: C50) Laboratory (Ref: C54) Hard (Ref: C51b) Medium (Ref: C52) Soft (Ref: C53) Protective Disk (Ref: C122)</p>	1 mm (Ref: M451) 2 mm (Ref: M452) 3 mm (Ref: M453) 4 mm (Ref: M454) 5 mm (Ref: M455) 6 mm (Ref: M456)	S8 - 3.75 Abutment
	1.5 mm (Ref: M46151) 3 mm (Ref: M46153)	S8 - 3.75, 15° Abutment



Recommended tightening torque max. 20 Ncm for the screw.

OVERDENTURE EASY-FIX ABUTMENTS //

Additional info/parts	Available sizes	Product code
 <p>Straight package: Metal cap (Ref: C50) Laboratory (Ref: C54) Medium (Ref: C52)</p>  <p>Angular package: Metal cap (Ref: C50) Laboratory (Ref: C54) Hard (Ref: C51b) Soft (Ref: C53)</p>  <p>S5 - S7 1 mm (Ref: C441) 2 mm (Ref: C442)</p> <p>Optional: Transfer T1-S5 (Ref: C58)</p>  <p>Analog A1-S5 (Ref: C59)</p>	1 mm (Ref: M571) 2 mm (Ref: M572) 3 mm (Ref: M573) 4 mm (Ref: M574) 5 mm (Ref: M575) 6 mm (Ref: M576)	S5 - 3.75 Abutment
	1 mm (Ref: M32171/C441) 2 mm (Ref: M32172/C441) 3 mm (Ref: M32173/C441)	S5 - S7 - 3.75, 17° Abutment
	1 mm (Ref: M32301/C441) 2 mm (Ref: M32302/C441) 3 mm (Ref: M32303/C441)	S5 - S7 - 3.75, 30° Abutment



Recommended tightening torque max. 20 Ncm for the screw.



TRANSFERS //



T1 - P9S/P7S
Transfer

D: 3 mm
(Ref: OR77)

! For P9S and P7S Ø3.0 / Ø3.2



T1 - P7S
Transfer

D: 3.6 mm
(Ref: O77)

! For P7S Ø3.75 / Ø4.2 / Ø5.0 / Ø6.0

ANALOGS //



A1 - P9S/P7S
Analog

D: 3 mm
(Ref: OR08)

! For P9S and P7S Ø3.0 / Ø3.2



A1 - P7S
Analog

D: 3.6 mm
(Ref: O08)

! For P7S Ø3.75 / Ø4.2 / Ø5.0 / Ø6.0

KEYS/DRIVERS //



K6

16 mm (Ref: ORB06)



WHY CHOOSE SGS DENTAL SYSTEM?
























04




FRIENDLY SUPPORT

We at SGS Dental Implant System strive to do all our best for our partners: high-quality service, flexibility, intention to help anytime. Give the best support they desire.

BASIC SURGICAL KIT //

<div>1 K5 - 9</div> <div>Driver - B59</div> <div></div>	<div>7 K8D - 23</div> <div>Driver - DB823</div> <div></div>	<div>13 K1 - 9</div> <div>Driver - B19</div> <div></div>	<div>19 K7N</div> <div>Retrieving screw - NB7</div> <div></div>
<div>2 K5 - 15</div> <div>Driver - B515</div> <div></div>	<div>8 K8D - 28</div> <div>Driver - DB828</div> <div></div>	<div>14 K1 - 15</div> <div>Driver - B115</div> <div></div>	<div>20 Parallel pin</div> <div>C8920 / 8927</div> <div></div>
<div>3 K8 - 23</div> <div>Driver - B823</div> <div></div>	<div>9 K5N - 9</div> <div>Driver - NB59</div> <div></div>	<div>15 K2 - 9</div> <div>Driver - B29</div> <div></div>	<div>21 K5 - 0</div> <div>Driver - B50</div> <div></div>
<div>4 K8 - 28</div> <div>Driver - B828</div> <div></div>	<div>10 K5N - 15</div> <div>Driver - NB515</div> <div></div>	<div>16 K2 - 15</div> <div>Driver - B215</div> <div></div>	<div>22 R8T</div> <div>Ratchet - C98</div> <div></div>
<div>5 K5D - 9</div> <div>Driver - DB59</div> <div></div>	<div>11 K8N - 23</div> <div>Driver - NB823</div> <div></div>	<div>17 K9 - 23</div> <div>Adaptor - B923</div> <div></div>	<div>23 D9</div> <div>Handle - C87</div> <div></div>
<div>6 K5D - 15</div> <div>Driver - DB515</div> <div></div>	<div>12 K8N - 28</div> <div>Driver - NB828</div> <div></div>	<div>18 K7</div> <div>Retrieving screw - B7</div> <div></div>	



SKM BASIC SURGICAL KIT

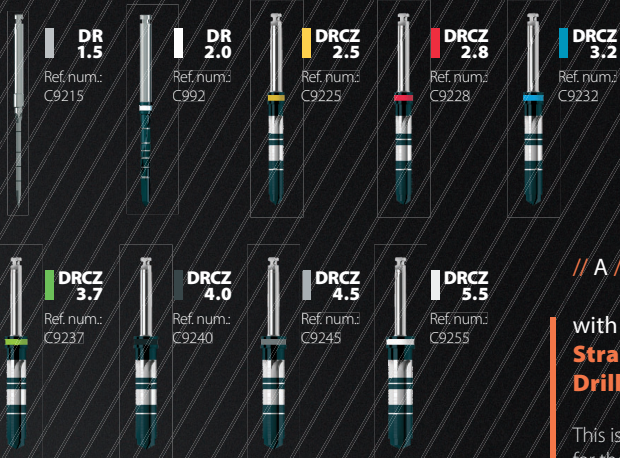

// A // CHOICE

with
**Straight
Drill kit**

This is the basic set
for the surgical kits.

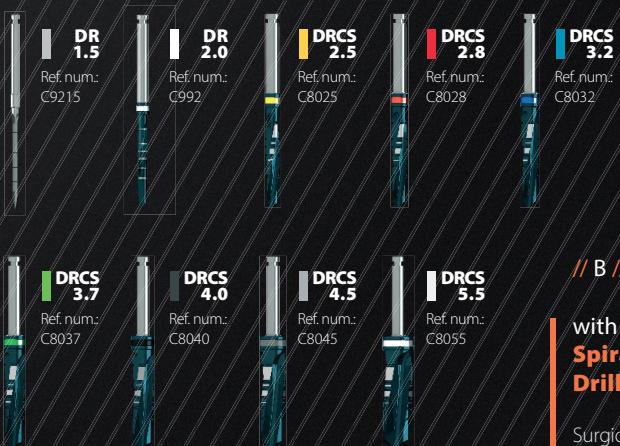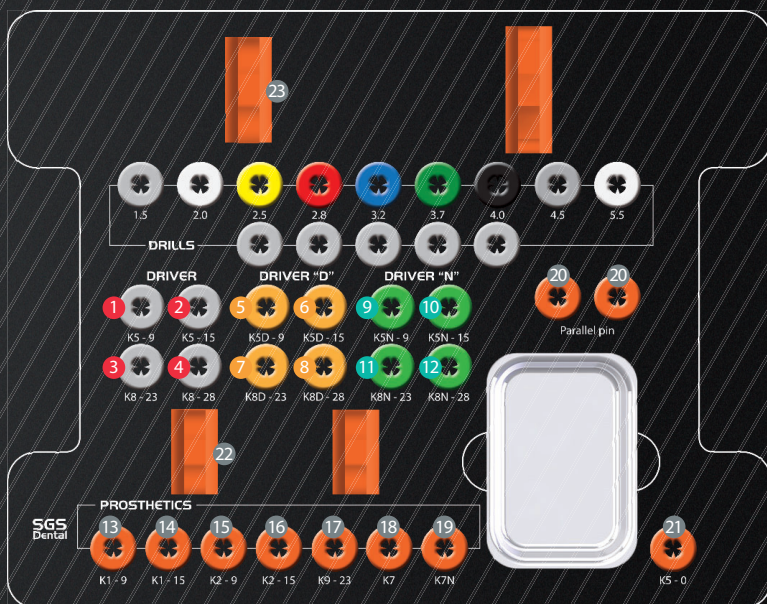

// B // CHOICE

with
**Spiral
Drill kit**

Surgical drills
recommended for
bone type D1-D2.

ADVANCED SURGICAL KIT //

1 K5 - 9

Driver - B59



8 K8D - 28

Driver - DB828



15 K2 - 9

Driver - B29



22 CKD

Checking kit - D81



29 CKN

Checking kit - N81



2 K5 - 15

Driver - B515



9 K5N - 9

Driver - NB59



16 K2 - 15

Driver - B215



23 CKD-15°

Checking kit - D8115



30 CKN-15°

Checking kit - N8115



3 K8 - 23

Driver - B823



10 K5N - 15

Driver - NB515



17 K9 - 23

Adaptor - B923



24 CKD-25°

Checking kit - D8125



31 CKN-25°

Checking kit - N8125



4 K8 - 28

Driver - B828



11 K8N - 23

Driver - NB823



18 K7

Retrieving screw - B7



25 CKD-35°

Checking kit - D8135



32 R8T

Ratchet - C98



5 K5D - 9

Driver - DB59




12 K8N - 28

Driver - NB828



19 K7N

Retrieving screw - NB7



26 CKD-45°

Checking kit - D8145



6 K5D - 15

Driver - DB515



13 K1 - 9

Driver - B19



20 Parallel pin

C8920 / C8927



27 S6/S7

Countersink - C9346



7 K8D - 23

Driver - DB823



14 K1 - 15

Driver - B115



21 K5 - 0

Driver - B50



28 S16S/S17S

Countersink - C9356





DR 1.5
Ref. num.: C9215



DR+ 2.0
Ref. num.: C992



DRCZ+ 2.5
Ref. num.: C9225



DRCZ+ 2.8
Ref. num.: C9228



DRCZ+ 3.2
Ref. num.: C9232



DRCZ+ 3.7
Ref. num.: C9237



DRCZ+ 4.0
Ref. num.: C9240



DRCZ+ 4.5
Ref. num.: C9245



DRCZ 5.5
Ref. num.: C9255



SGS Dental
Rapid Material System

100% accuracy / 100% reproducibility to make the jump from CAD to clinical application

20
15
10
5
0



DRR 13
Ref. num.: C111213



DRR 11.5
Ref. num.: C111211



DRR 10
Ref. num.: C111210



DRR 8
Ref. num.: C11128



DRR 6
Ref. num.: C11126



CS 3.5
Ref. num.: C9335



CS 3.75
Ref. num.: C9337



CS 4.2
Ref. num.: C9342






































CS 4.5
Ref. num.: C9345




CS 5.0
Ref. num.: C9350

CONICAL STOPPER DRILL KIT //

<div><div>L6</div><div>Ø 2.0</div><div>Ref. num.: C10126</div></div> <div></div>	<div><div>L6</div><div>Ø 2.5</div><div>Ref. num.: C105256</div></div> <div></div>	<div><div>L6</div><div>Ø 2.8</div><div>Ref. num.: C105286</div></div> <div></div>	<div><div>L6</div><div>Ø 3.2</div><div>Ref. num.: C105326</div></div> <div></div>	<div><div>L6</div><div>Ø 3.7</div><div>Ref. num.: C105376</div></div> <div></div>	<div><div>L6</div><div>Ø 4.0</div><div>Ref. num.: C105406</div></div> <div></div>	<div><div>L6</div><div>Ø 4.5</div><div>Ref. num.: C105456</div></div> <div></div>
<div><div>L8</div><div>Ø 2.0</div><div>Ref. num.: C10128</div></div> <div></div>	<div><div>L8</div><div>Ø 2.5</div><div>Ref. num.: C105258</div></div> <div></div>	<div><div>L8</div><div>Ø 2.8</div><div>Ref. num.: C105288</div></div> <div></div>	<div><div>L8</div><div>Ø 3.2</div><div>Ref. num.: C105328</div></div> <div></div>	<div><div>L8</div><div>Ø 3.7</div><div>Ref. num.: C105378</div></div> <div></div>	<div><div>L8</div><div>Ø 4.0</div><div>Ref. num.: C105408</div></div> <div></div>	<div><div>L8</div><div>Ø 4.5</div><div>Ref. num.: C105458</div></div> <div></div>
<div><div>L10</div><div>Ø 2.0</div><div>Ref. num.: C101210</div></div> <div></div>	<div><div>L10</div><div>Ø 2.5</div><div>Ref. num.: C1052510</div></div> <div></div>	<div><div>L10</div><div>Ø 2.8</div><div>Ref. num.: C1052810</div></div> <div></div>	<div><div>L10</div><div>Ø 3.2</div><div>Ref. num.: C1053210</div></div> <div></div>	<div><div>L10</div><div>Ø 3.7</div><div>Ref. num.: C1053710</div></div> <div></div>	<div><div>L10</div><div>Ø 4.0</div><div>Ref. num.: C1054010</div></div> <div></div>	<div><div>L10</div><div>Ø 4.5</div><div>Ref. num.: C1054510</div></div> <div></div>
<div><div>L11,5</div><div>Ø 2.0</div><div>Ref. num.: C101211</div></div> <div></div>	<div><div>L11,5</div><div>Ø 2.5</div><div>Ref. num.: C1052511</div></div> <div></div>	<div><div>L11,5</div><div>Ø 2.8</div><div>Ref. num.: C1052811</div></div> <div></div>	<div><div>L11,5</div><div>Ø 3.2</div><div>Ref. num.: C1053211</div></div> <div></div>	<div><div>L11,5</div><div>Ø 3.7</div><div>Ref. num.: C1053711</div></div> <div></div>	<div><div>L11,5</div><div>Ø 4.0</div><div>Ref. num.: C1054011</div></div> <div></div>	<div><div>L11,5</div><div>Ø 4.5</div><div>Ref. num.: C1054511</div></div> <div></div>
<div><div>L13</div><div>Ø 2.0</div><div>Ref. num.: C101213</div></div> <div></div>	<div><div>L13</div><div>Ø 2.5</div><div>Ref. num.: C1052513</div></div> <div></div>	<div><div>L13</div><div>Ø 2.8</div><div>Ref. num.: C1052813</div></div> <div></div>	<div><div>L13</div><div>Ø 3.2</div><div>Ref. num.: C1053213</div></div> <div></div>	<div><div>L13</div><div>Ø 3.7</div><div>Ref. num.: C1053713</div></div> <div></div>	<div><div>L13</div><div>Ø 4.0</div><div>Ref. num.: C1054013</div></div> <div></div>	<div><div>L13</div><div>Ø 4.5</div><div>Ref. num.: C1054513</div></div> <div></div>

SKD-C

CONICAL STOPPER DRILL KIT

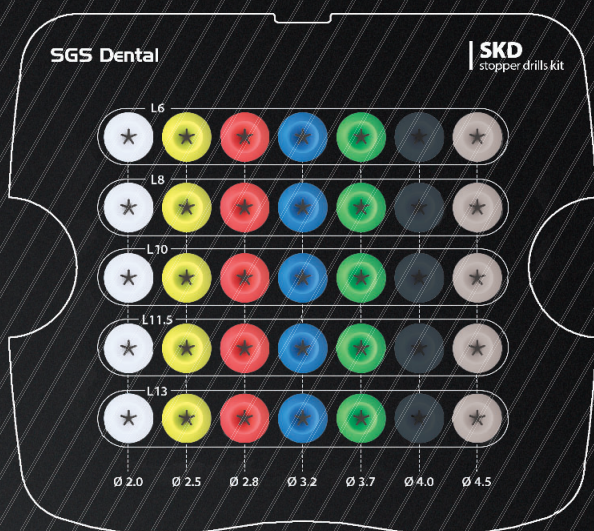

DRCST

Conical stopper drills

OTHER DRILLS //

EXTRA DRILLS

DR - 1.5

Marker drill

Ref. num.: C9215

DR-E

Drilling extension

Ref. num.: C93

DR-T 4/5

Trephine drill 4mm


Ref. num.: C9445

DR-T 5/6

Trephine drill 5mm

Ref. num.: C9456

Material: stainless steel

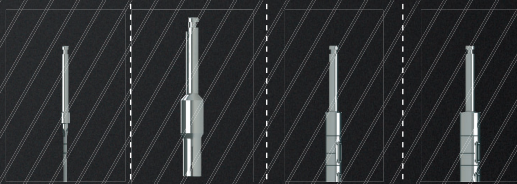

SHORT DRILLS //

EXTRA DRILLS

DRS - 2.0

Ø 2.0

Ref. num.: C1002

DRS - 2.5

Ø 2.5

Ref. num.: C10025

DRS - 2.8

Ø 2.8

Ref. num.: C10028

DRS - 3.2

Ø 3.2

Ref. num.: C10032

DRS - 3.7

Ø 3.7

Ref. num.: C10037

DRS - 4.0

Ø 4.0

Ref. num.: C10040

DRS - 4.5


Ø 4.5

Ref. num.: C10045

DRS - 5.5

Ø 5.5

Ref. num.: C10055

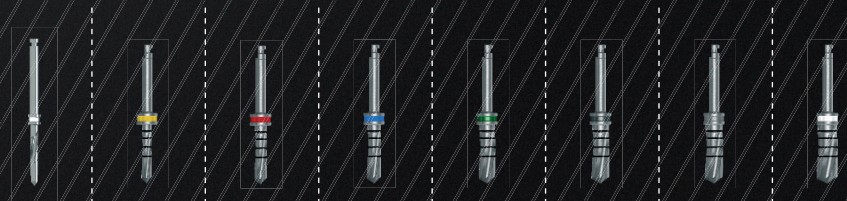

PLATFORM 3.75 (P1, P7) //

Scanning Abutment



For lab use and intra-oral


Digital analog



Titanium Base

Single tooth

Bridges/bars



0.35 mm
(Ref: M108S03S)
1.5 mm
(Ref: M108S15)
2.5 mm
(Ref: M108S25)

Intended to be used for custom casting prosthetic restorations on single or multiple implants



0.35 mm
(Ref: M109S03S)
1.5 mm
(Ref: M109S15)
2.5 mm
(Ref: M109S25)

Intended to be used for custom casting prosthetic restorations only on multiple implants

Titanium Base

Single tooth

Bridges/bars



0.35 mm
(Ref: M110S05)
1.5 mm
(Ref: M110S15)

Intended to be used for custom casting prosthetic restorations on single or multiple implants



0.35 mm
(Ref: M111S03S)

Intended to be used for custom casting prosthetic restorations only on multiple implants

NARROW CONICAL PLATFORM (P7N) //

Scanning Abutment



For lab use and intra-oral

Digital analog



Titanium Base

Single tooth

Bridges/bars



0.35 mm
(Ref: N108)

Intended to be used for custom casting prosthetic restorations on single or multiple implants



0.35 mm
(Ref: N109)

Intended to be used for custom casting prosthetic restorations only on multiple implants

CONICAL PLATFORM (P1D, P7D) //

Scanning Abutment



For lab use and intra-oral


Digital analog



Titanium Base

Single tooth

Bridges/bars



0.35 mm
(Ref: D108S03S)
1.5 mm
(Ref: D108S15)
2.5 mm
(Ref: D108S25)

Intended to be used for custom casting prosthetic restorations on single or multiple implants



0.35 mm
(Ref: D109S03S)
1.5 mm
(Ref: D109S15)
2.5 mm
(Ref: D109S25)

Intended to be used for custom casting prosthetic restorations only on multiple implants

Titanium Base

Single tooth

Bridges/bars



0.35 mm
(Ref: D110S05)
1.5 mm
(Ref: D110S15)

Intended to be used for custom casting prosthetic restorations on single or multiple implants



0.35 mm
(Ref: D111S03S)

Intended to be used for custom casting prosthetic restorations only on multiple implants

S6-S7 //

Scanning Abutment

Single tooth

Bridges/bars



**SPCS - S6/S7
with hex**
11 mm
(Ref: C75)



**SPCS - S6/S7
without hex**
11 mm
(Ref: C76)

For lab use and intra-oral

Digital analog



**A1 - Digital -
S6/S7**
(Ref: C1125)

Titanium Base

Single tooth

Bridges/bars



**STCS - S6/S7
with hex**
(Ref: C77)



**STCS - S6/S7
without hex**
(Ref: C78)

Intended to be used for custom casting prosthetic restorations on single or multiple implants

Intended to be used for custom casting prosthetic restorations only on multiple implants

Screw



**S1a
S6/S7**
(Ref: 120)

Screw for S6-S7

S16S-S17S //

Scanning Abutment

Single tooth

Bridges/bars



**SPCS - S16S
with hex**
11 mm
(Ref: C79)



**SPCS - S16S/S17S
without hex**
11 mm
(Ref: C80)

For lab use and intra-oral

Digital analog



**A1 - Digital -
S16S/S17S**
(Ref: C1135)

Titanium Base

Single tooth

Bridges/bars



**STCS - S16S
with hex**
(Ref: C81)



**STCS - S16S/S17S
without hex**
(Ref: C82)

Intended to be used for custom casting prosthetic restorations on single or multiple implants

Intended to be used for custom casting prosthetic restorations only on multiple implants

Screw



**S1a
S16S/S17S**
(Ref: 130)

Screw for S6-S7

MILLING ABUTMENT OPTIONS //

Internal Hexagon - Platform 3.75



SIB-3.75-AG
(Ref: M0109)



SIB-3.75-MD11
(Ref: M0113)



SIB-3.75-DS
(Ref: M0111)



SIB-3.75-ZZ
(Ref: M0115)



SIB-3.75-KV
(Ref: M0112)

NEW



SIB-3.75-AR
(Ref: M0110)



SIB-3.75-MD16
(Ref: M0114)

Blue screw for the final restoration.



Conical - Platform



SIBD-AG
(Ref: D0109)



SIBD-MD11
(Ref: D0113)



SIBD-KV
(Ref: D0112)

NEW



SIBD-AR
(Ref: D0110)



SIBD-MD16
(Ref: D0114)



SIBD-DS
(Ref: D0111)



SIBD-ZZ
(Ref: D0115)

Gold screw for the final restoration.



Titanium Bases and Scan Bodies for Laboratory and Clinic usage


The Titanium Bases offer a wide array of options for the user, offering the options of both Single Tooth (Anti-Rotation) and Bridge (Free-Rotation) as well as Libraries containing Direct-to-Implant options.

Both options are offered in two available heights of 0.5mm and 1.5mm for the Internal HEX 3.75 Platform as well as the Double-Connection Conical 3.5 platforms, and in 1.0mm for the Narrow Conical 2.1 platform.

For an accurate reading of the implant positioning into the CAD software, Scan Bodies are used within the laboratory to capture the correct position, orientation and rotation of the analogs placed within the working model or directly from the patient via usage of an appropriate Scanner to translate the Implant's/Analog's position into the CAD/CAM system. The scan bodies are scanned and detected optically and the information is transferred digitally in-order to produce individual abutments as well as crowns and bridge framework by usage of the CAD/CAM technology.

Immediate Benefits

- Compatible with a wide array of CAD/CAM systems
- Longevity made possible by usage of highest quality PEEK material for the Scan Bodies and Titanium Grade 5 for the Titanium Bases
- Bio-Compatibility
- Autoclavability
- Removable screw for easy maintenance and cleaning
- Easy to Scan body geometry for the Scan Body
- Libraries containing Direct-to-Implant support options as well
- Discrete choice of either Single Tooth (Anti-Rotation) or Bridge (Free-Rotation) at the user's disposal
- Milled crowns result in tight tolerance results for optimum accuracy and compatibility with Implants and Screws for a smooth operation

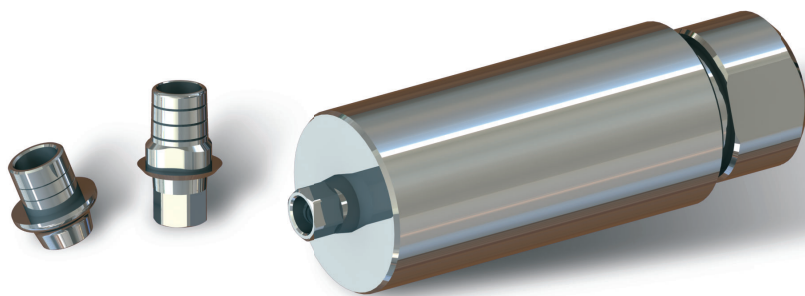

3shape

exocad


AMANNGIRRBACH

 dental wings

Zirkonzahn®

*Dental Wings, 3shape, AmannGirrbach,
Zirkonzahn and Exocad are trademarks or registered
trademarks of their respective owners:
Dental Wings LLC., 3Shape A/S, Amann Girenbach AG,
Zirkonzahn USA Inc., Exocad GmbH.*

Ask our colleagues for detailed
instructions and download links to
library data.

SIMPLICITY GUARANTEES SUCCESS

All rights reserved. No part of this publication may be reproduced, distributed, or transmitted in any form or by any means, including photocopying, recording, or other electronic or mechanical methods, without the prior written permission of the publisher, except in the case of brief quotations embodied in critical reviews and certain other non-commercial uses permitted by copyright law.



SGS Dental Implant System Holding - Zn
Talhofstrasse 9, CH-9000 St. Gallen, **Switzerland**

FL-9494, Schaan, Landstrasse 27
Liechtenstein
Tel.: 00423 233 5050, 00423 233 5051
Fax: 00423 233 5052

SGS International Kft./Ltd. Worldwide Logistic Center
H-1047 Budapest, Károlyi István u. 1-3.
Tel: +36 1 328 0427
www.sgs-dental.com

